



CRANE SPECIFICATION

FRANNA AT40

COMPREHENSIVE LIFTING SOLUTIONS

We look forward to providing a full heavy lift engineering and crane solution for your next project. Our heavy lift engineers and on site personnel are experienced in managing and organising highly de-manding lift requirements.

Contact us to discuss your lifting requirements and a free quote.

BRISBANE (HQ)

07 3907 5800
37 Paringa Rd, Murarrie, QLD, 4172

ROMA

07 4622 5522
8 Wormwell Drive, Roma QLD 4455

BALLINA

02 6686 7748
5 Convair Ave, Ballina, NSW, 2478

SUNSHINE COAST

0409 595 618
562 Maroochydore Rd, Kunda Park, QLD, 4556

GLADSTONE

07 4972 9326
7 Red Cover Rd, Gladstone, QLD, 4680

TOWNSVILLE

07 4779 4088
16 Mackley St, Garbutt QLD 4814

ROCKHAMPTON

07 4939 1095
371 Leichhardt St, Rockhampton QLD, 4700

MACKAY

07 4952 6998
135 Diesel Drive, Paget QLD 4740

GOLD COAST

07 5593 4688
9 Kimberley Rd, Burleigh Heads, QLD, 4220



TECHNICAL
DATASHEET

FRANNA[®]
A TEREX BRAND

AT40

**PICK AND CARRY
CRANE**



MAXIMUM CAPACITY
40t



MAXIMUM BOOM LENGTH
19.8m



MAXIMUM HOOK HEIGHT
19m

terex.com/franna



OVERVIEW

The AT 40 is the largest pick and carry crane in the Franna product range and has been specifically designed for higher capacity lifting applications, boasting 44% more load moment capacity than the Franna MAC 25. The 3-axle design eliminates the need for a removable counterweight and the third axle control system raises axle 3 when operating on a work site to provide a smooth turning circle.



⚙️ KEY FEATURES AND BENEFITS:

- ▶ 40 tonne at 1.1m radius on lug
- ▶ 35 tonne at 2.0m radius on 8 part hook block
- ▶ 20 tonne on machinery (Rhino) hook
- ▶ 19m maximum hook height
- ▶ Single line pull 4.3 tonne
- ▶ Dynamic LMI (patent protected)
- ▶ Designed to AS1418.5 (2013)
- ▶ Full width isolated cabin ensures excellent visibility
- ▶ Automatic 4WD engages when a loss of traction is detected
- ▶ High strength boom with easy maintenance
- ▶ Hydro-pneumatic suspension enhances roadability
- ▶ Turret counterweight for greater articulated lifting capacity

TECHNICAL DESCRIPTION

01. Boom

Maximum boom length	19.8m
Maximum hook height	19.0m
Boom elevation angle range	-5°/60°
Articulation	35° R / 35° L
Fixed lug	40 tonne
Machinery hook (rhino)	20 tonne

02. Winch

Maximum line pull	4.3 tonne
Two speed winch	38 m/min / 76 m/min
7 Part Hook block	30 tonne maximum rated capacity
Optional 8 Part Hook block	35 tonne maximum rated capacity

03. Engine & Transmission

Standard engine	Mercedes OM 906
Engine power	205kW
Engine torque	1100 Nm
Fuel Type	Diesel
Fuel Capacity	500 litre
Transmission	Allison 6 speed
Transfer case	ZF 2:1 Ratio

04. Hydraulic System

Axial piston pump	135cc/rev
Maximum pump flow rate	300 litre/min
Maximum working pressure	350 bar
Hydraulic tank capacity	500 litre

05. Chassis

Front Axle (Tare / GVM)	11,100kg / 12,000kg
Axle 2 (Tare / GVM)	9,200kg / 10,000kg
Axle 3 (Tare / GVM)	9,200kg / 10,000kg
Axle Total (Tare / GVM)	29,500kg / 32,000kg
Turning circle (Highway)	10.2m
Turning circle (crane mode)	9.0m

06. Brakes & Suspension


Brake System	Air operated disc brakes with ABS
Suspension	Hydro pneumatic suspension

07. Vehicle Performance

Maximum rated travel speed	80km/h
Gradeability	39%



RADIUS LOAD CHART

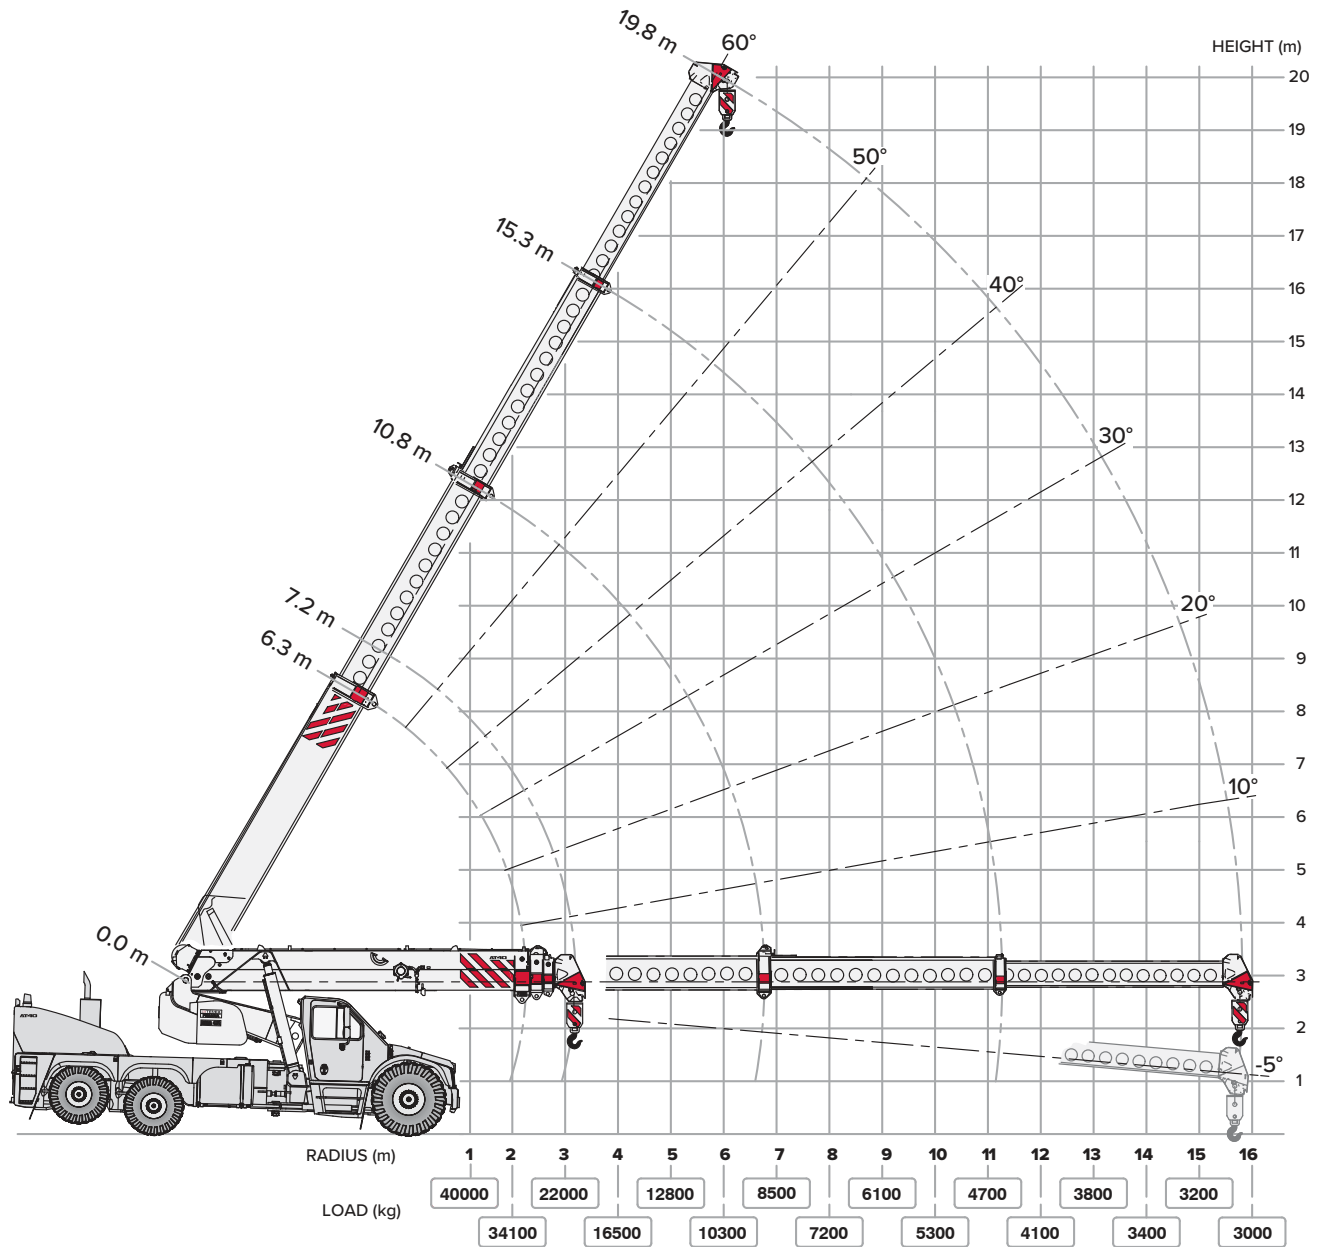

NOTE: Rated Capacity values shown are for the Pick and Carry Chart.
The Static Chart will give higher rated capacities.



LOAD CHART

RATED CAPACITY CHART STATIC (0 km/hr) - FALL BLOCK

RAD	BOOM LENGTH TO HEAD SHEAVES - 3rd BOOM RETRACTED														3rd BOOM EXTENDING				RAD	
	7.23	7.50	8.00	8.50	9.00	9.50	10.00	10.50	11.00	12.00	13.00	14.00	15.00	16.00	17.00	18.00	19.83			
m	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	m		
1.0	35000	35000	35000	35000	35000	35000												1.0		
	35000	35000	33000	28700	25500	23000														
	47	49	52	55	57	59														
2.0	35000	35000	35000	35000	35000	34900	34300	33700	33100									2.0		
	34400	30800	26100	22900	20500	18500	17000	15600	14500											
	34	37	42	46	49	52	54	56	58											
2.5	30200	30300	30300	30400	30100	29600	29100	28600	28200	27400								2.5		
	29400	29500	29500	29600	29300	25500	22600	20400	18500	15700										
	27800	27900	24300	21100	18800	17000	15600	14400	13400	11700										
	25	30	36	41	44	47	50	52	55	58										
3.0	24700	24800	24800	24900	24900	25000	25000	24800	24500	23800	23200							3.0		
	24000	24100	24200	24200	24300	24300	22000	19700	17900	15100	13100									
	22700	22800	22900	19900	17600	15900	14500	13400	12400	10900	9700									
	11	20	29	35	39	43	46	49	51	55	58									
3.5	23800	21700	20900	21000	21000	21100	21100	21100	21000	20500	20100							3.5		
	23200	21100	20400	20400	20500	20500	20500	19300	17400	14700	12700	11200								
	21900	19900	19200	19300	16800	15000	13600	12600	11700	10200	9100	8200								
	(3.1)	(3.4)	19	28	34	38	42	45	48	52	56	59								
4.0			18600	18000	18100	18100	18200	18200	18200	18200	18200	18000	17600					4.0		
			18100	17500	17600	17600	17700	17700	17100	14300	12300	10900	9700							
			17100	16500	16500	14400	13000	11900	11000	9600	8600	7700	7000							
			(3.9)	19	27	33	37	41	44	49	53	56	59							
5.0				16200	14400	14000	14000	14100	14100	14100	14100	14200	14200	14200	14200			5.0		
				15800	14000	13600	13600	13700	13700	13700	11800	10300	9200	8300	7700					
				14900	13100	12800	12400	11100	10100	8700	7700	6900	6300	5800	5500					
				(4.4)	(4.9)	18	26	31	36	42	47	51	54	57	59					
6.0						12800	11500	11300	11300	11400	11400	11400	11400	11500	11600	11800		6.0		
						12500	11200	11000	11000	11000	11100	10000	8800	7900	7300	6800				
						11700	10500	10300	9800	8200	7100	6300	5700	5300	5000	4800				
						(5.4)	(5.9)	17	25	34	40	45	49	52	55	58				
7.0								10500	9600	9400	9400	9500	9500	9500	9700	9800	10000	7.0		
								10200	9300	9100	9200	8600	7700	7000	6500	5800				
								9500	8700	8000	6700	5900	5300	4800	4600	4400	4000			
								(6.4)	(6.9)	24	33	39	44	48	51	54	58			
8.0									8100	8000	8000	8000	8100	8200	8300	8500		8.0		
									7800	7700	7700	7800	7500	6900	6300	5600				
									7300	6700	5600	5000	4500	4300	4000	3700				
									(7.9)	23	32	38	42	46	50	54				
9.0									6900	6800	6900	6900	7000	7200	7300			9.0		
									6700	6600	6600	6700	6800	6200	5400					
									6200	5600	4800	4300	4000	3800	3500					
									(8.9)	22	31	37	41	45	51					
10.0									6000	5900	6000	6100	6200	6400				10.0		
									5800	5700	5800	5900	6000	5300						
									5400	4800	4100	3800	3600	3200						
									(9.9)	21	30	36	40	47						
11.0									5300	5200	5400	5500	5600					11.0		
									5100	5100	5200	5300	5200							
									4700	4200	3700	3400	3100							
									(10.9)	21	29	35	42							
12.0									4700	4700	4800	5000						12.0		
									4500	4600	4700	4800								
									4200	3700	3300	2900								
									(11.9)	20	28	38								
13.0										4200	4300	4500						13.0		
										4100	4200	4300								
										3800	3400	2800								
										(12.9)	20	32								
14.0											3900	4000						14.0		
											3500	2800								
											(13.9)	26								
												3600								
15.0												2900						15.0		
												17								
												3300								
												3000								
15.68																		15.68		
												0								
														13.00	14.00	15.00	16.00	17.00	18.00	19.83

WINCH RATED CAPACITY

2 FALLS 8700

4 FALLS 17500

6 FALLS 26200

7 FALLS 30600

8 FALLS 35000

8100800080008000

7800770077007800

7300670056005000

(7.9)233238

6900680069006900

6700660066006700

6200560048004300

(8.9)223137

6000590060006100

5800570058005900

5400480041003800

(9.9)213036

5300520054005500

5100510052005300

4700420037003400

(10.9)212935

4700470048005000

4500460047004800

4200370033002900

(11.9)202838

420043004500

410042004300

380034002800

(12.9)2032

39004000

35002800

(13.9)26

3600

2900

3300

3000

0

UNITS:

- ANGLES IN DEGREES

- LENGTHS IN METRES

- LOAD IN KILOGRAMS

KEY:

14200RC @ ARTIC: 0° PITCH: -2.3 ROLL: -1.0

10300RC @ ARTIC: 20° PITCH: -2.3 ROLL: -3.0

6900RC @ ARTIC: 35° PITCH: -2.3 ROLL: -3.5

51BOOM ANGLE

(3.1)RADIUS AT ZERO BOOM ANGLE

Note:

Pitch & Roll angles indicated are representative of lifts based on firm level ground with tyres at specified pressures.

WINCH RATED CAPACITY

2	FALLS	8700
4	FALLS	17500
6	FALLS	26200
7	FALLS	30600
8	FALLS	35000

UNITS:

- ANGLES IN DEGREES
- LENGTHS IN METRES
- LOAD IN KILOGRAMS

KEY:

14200	RC @ ARTIC:	0°	PITCH:	-2.3	ROLL:	-1.0
10300	RC @ ARTIC:	20°	PITCH:	-2.3	ROLL:	-3.0
6900	RC @ ARTIC:	35°	PITCH:	-2.3	ROLL:	-3.5
51	BOOM ANGLE					
(3.1)	RADIUS AT ZERO BOOM ANGLE					

Note: Pitch & Roll angles indicated are representative of lifts based on firm level ground with tyres at specified pressures.

LOAD CHART

RATED CAPACITY CHART PICK AND CARRY (0 - 1.44 km/hr) - FALL BLOCK

RAD	BOOM LENGTH TO HEAD SHEAVES - 3rd BOOM RETRACTED														3rd BOOM EXTENDING				RAD
	7.23	7.50	8.00	8.50	9.00	9.50	10.00	10.50	11.00	12.00	13.00	14.00	15.00	16.00	17.00	18.00	19.83		
m	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	m	
1.0	35000	35000	35000	35000	35000	35000												1.0	
	35000	33300	28500	25000	22300	20100													
	47	49	52	55	57	59													
2.0	34100	34200	34200	34300	34300	33600	33000	32300	31800									2.0	
	30600	27400	23300	20500	18300	16600	15200	14000	13000										
	34	37	42	46	49	52	54	56	58										
2.5	26800	26900	26900	27000	27000	27000	27100	27100	27100	26300								2.5	
	26100	26200	26200	26300	25400	22200	19800	17800	16300	13800									
	24700	24800	21900	19100	17000	15400	14100	13000	12100	10600									
	25	30	36	41	44	47	50	52	55	58									
3.0	22000	22000	22100	22100	22200	22200	22200	22200	22200	22300	22300							3.0	
	21400	21400	21500	21500	21600	21600	19400	17400	15800	13400	11600								
	20200	20200	20300	18200	16000	14400	13200	12200	11300	9900	8800								
	11	20	29	35	39	43	46	49	51	55	58								
3.5	21200	19300	18600	18600	18700	18700	18700	18800	18800	18800	18800	18800						3.5	
	20600	18800	18100	18100	18200	18200	18200	17100	15500	13000	11300	9900							
	19500	17700	17100	17100	15400	13800	12500	11500	10600	9300	8300	7400							
	(3.1)	(3.4)	19	28	34	38	42	45	48	52	56	59							
4.0			16500	16000	16100	16100	16100	16200	16200	16200	16200	16200	16200					4.0	
			16100	15600	15600	15700	15700	15700	15300	12800	11000	9700	8600						
			15200	14700	14800	13300	12000	10900	10100	8800	7800	7000	6400						
			(3.9)	19	27	33	37	41	44	49	53	56	59						
5.0				14400	12800	12400	12500	12500	12500	12500	12600	12600	12600	12600	12800			5.0	
				14000	12400	12100	12100	12100	12200	12200	10600	9300	8200	7400	6800				
				13200	11700	11400	11400	10300	9400	8000	7100	6300	5700	5300	5000				
				(4.4)	(4.9)	18	26	31	36	42	47	51	54	57	59				
6.0						11400	10300	10000	10100	10100	10100	10200	10200	10200	10300	10400		6.0	
						11100	10000	9800	9800	9800	9800	9000	7900	7100	6600	6100			
						10400	9400	9200	9200	7600	6600	5800	5200	4800	4500	4300			
						(5.4)	(5.9)	17	25	34	40	45	49	52	55	58			
7.0									9300	8500	8400	8400	8400	8400	8500	8600	8700	8900	7.0
									9000	8200	8100	8100	8200	7800	6900	6300	5900	5200	
									8500	7700	7500	6300	5500	4900	4400	4200	4000	3700	
									(6.4)	(6.9)	24	33	39	44	48	51	54	58	

WINCH RATED CAPACITY

2	FALLS	8700
4	FALLS	17500
6	FALLS	26200
7	FALLS	30600
8	FALLS	35000

UNITS:

- ANGLES IN DEGREES
- LENGTHS IN METRES
- LOAD IN KILOGRAMS

KEY:

12600	RC @ ARTIC:	0°	PITCH:	-2.3	ROLL:	-1.0
9300	RC @ ARTIC:	20°	PITCH:	-2.3	ROLL:	-3.0
6300	RC @ ARTIC:	35°	PITCH:	-2.3	ROLL:	-3.5
51	BOOM ANGLE					
(3.1)	RADIUS AT ZERO BOOM ANGLE					

Note: Pitch & Roll angles indicated are representative of lifts based on firm level ground with tyres at specified pressures.