



CRANE SPECIFICATION

KOBELCO RK200

COMPREHENSIVE LIFTING SOLUTIONS

We look forward to providing a full heavy lift engineering and crane solution for your next project. Our heavy lift engineers and on site personnel are experienced in managing and organising highly de-manding lift requirements.

Contact us to discuss your lifting requirements and a free quote.

BRISBANE (HQ)

07 3907 5800
37 Paringa Rd, Murarrie, QLD, 4172

ROMA

07 4622 5522
8 Wormwell Drive, Roma QLD 4455

BALLINA

02 6686 7748
5 Convair Ave, Ballina, NSW, 2478

SUNSHINE COAST

0409 595 618
562 Maroochydore Rd, Kunda Park, QLD, 4556

GLADSTONE

07 4972 9326
7 Red Cover Rd, Gladstone, QLD, 4680

TOWNSVILLE

07 4779 4088
16 Mackley St, Garbutt QLD 4814

ROCKHAMPTON

07 4939 1095
371 Leichhardt St, Rockhampton QLD, 4700

MACKAY




07 4952 6998
135 Diesel Drive, Paget QLD 4740

GOLD COAST

07 5593 4688
9 Kimberley Rd, Burleigh Heads, QLD, 4220



Dimensions

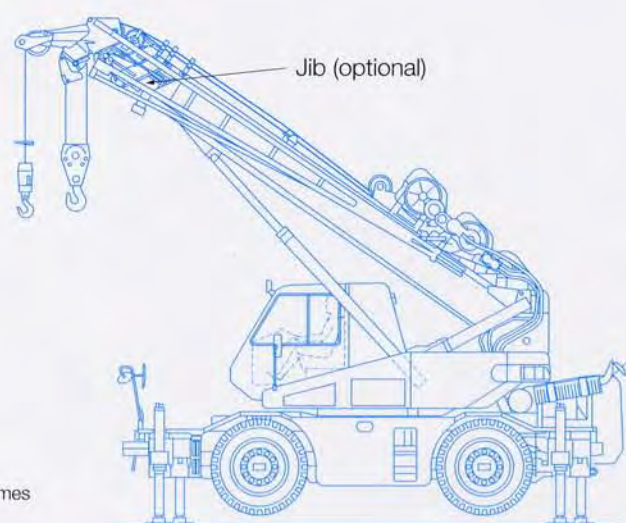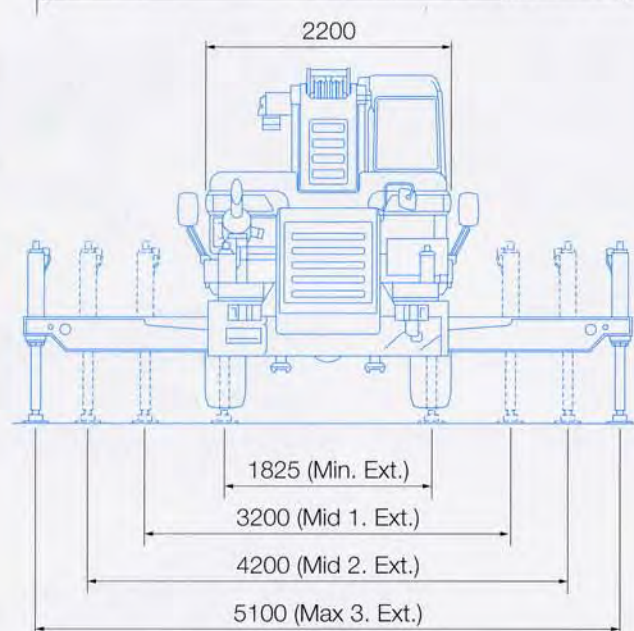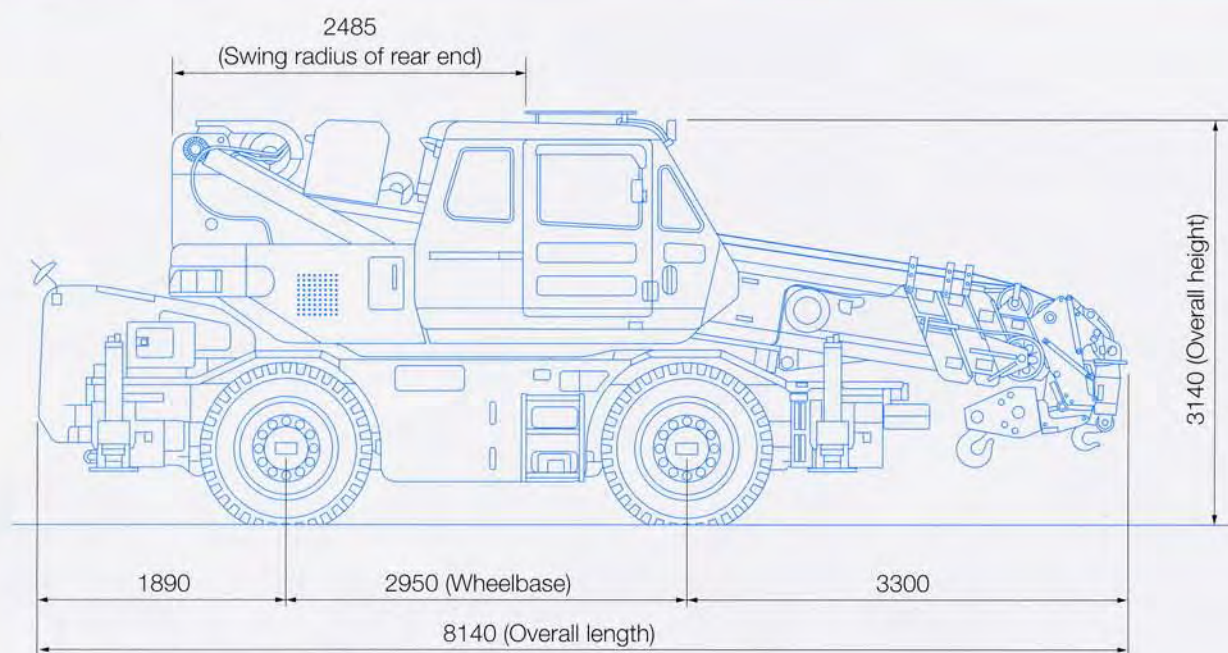

The data described here is for reference only. Since described values may sometimes be different from those of the actual machine, use this data for reference only.

Working range


The diagram shows the relations between the operating radius and lifting height and the boom length and boom hoisting angle.

This diagram does not include the boom deflection. Since the actual operating radius is somewhat extended from that shown in this diagram due to deflection of the boom, be careful.

The operating radius is the horizontal distance from the centreline of rotation to a vertical line through the centreline of gravity of the load.

When estimating a lifting height above the ground, make allowance for sling wire length.

NOTE: This diagram does not include deflection of the boom.

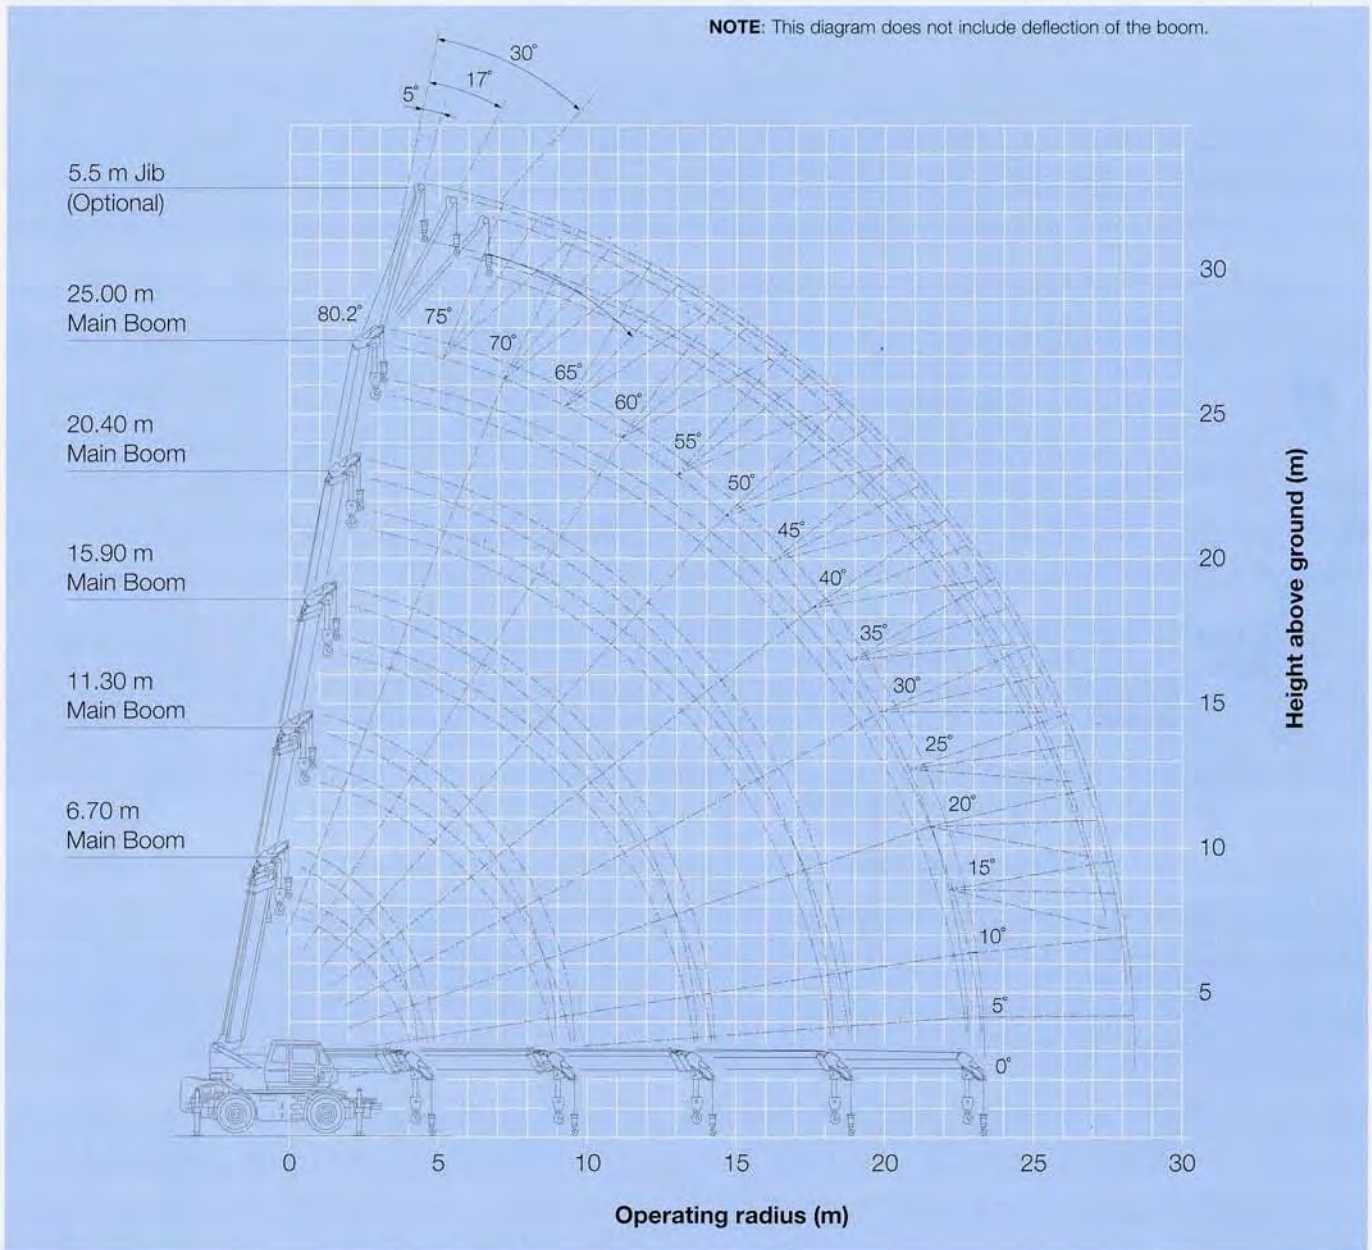

Standard equipment

Safety device for crane

- Load moment indicator (with automatic cut out)
- Hook over hoist prevention
- Working area limit
- Outrigger length detector
- Swing alarm with flasher
- Function lock lever
- Safety and check monitor
- Hook latch for wire
- Hydraulic safety valve
- Boom telescope safety
- Boom elevating safety
- Hoist safety
- Free fall inter lock
- Outrigger safety

Safety device for carrier

- Emergency steering pump
- Rear steering auto lock
- Suspension lock
- Engine over run alarm
- Safety and check monitor

Others

- Air conditioning
- Outrigger box (570 x 510 x 60)
- Cool box
- Lunch box
- Magazine rack
- AM radio

Rated crane loads

Boom rated loads (tonne) with outriggers used

Unit: tonne

Boom length (m)	Outriggers Max. (5.1 m) Ext. (360)					Outriggers Mid. (4.2 m) Ext. (360)				
	6.7	11.3	15.9	20.4	25.0	6.7	11.3	15.9	20.4	25.0
Operating radius (m)										
2.5	20.00	12.00	9.00	7.00		20.00	12.00	9.00	7.00	
3.0	16.00	12.00	9.00	7.00		16.00	12.00	9.00	7.00	
3.5	14.00	12.00	9.00	7.00	5.00	14.00	12.00	9.00	7.00	5.00
4.0	12.50	12.00	9.00	7.00	5.00	12.50	12.00	9.00	7.00	5.00
4.5	11.50	11.10	8.50	7.00	5.00	11.20	10.55	8.30	7.00	5.00
5.0		10.25	8.05	7.00	5.00		9.15	7.65	7.00	5.00
5.5		9.40	7.60	6.60	4.75		7.75	6.95	6.55	4.75
6.0		8.55	7.15	6.20	4.55		6.55	6.30	6.10	4.55
6.5		7.70	6.70	5.80	4.35		5.65	5.60	5.70	4.35
7.0		6.85	6.20	5.50	4.15		4.90	4.95	5.25	4.15
7.5		6.00	5.70	5.15	3.90		4.30	4.40	4.70	3.95
8.0		5.30	5.20	4.85	3.70		3.80	3.85	4.20	3.70
9.0		4.25	4.25	4.30	3.30		3.05	3.10	3.40	3.30
10.0			3.50	3.75	3.00			2.50	2.80	2.90
11.0			2.90	3.20	2.70			2.05	2.35	2.50
12.0			2.45	2.75	2.50			1.70	1.95	2.15
13.0			2.05	2.35	2.30			1.40	1.65	1.85
14.0			1.85	2.05	2.10			1.25	1.45	1.60
15.0			(13.6 m)					(13.6 m)		
16.0				1.75	1.90				1.20	1.40
17.0				1.50	1.70				1.00	1.20
18.0				1.32	1.50				0.80	1.00
19.0				1.15	1.30				0.65	0.85
20.0				1.15	1.15				0.60	0.70
21.0				(18.1 m)					(18.1 m)	
22.0					1.00					0.60
23.0					0.90					0.50
24.0					0.80					0.40
25.0					0.74					0.35
26.0					(22.7 m)					(22.7 m)
Min. boom angle	0°	0°	0°	0°	0°	0°	0°	0°	0°	0°

Boom length (m)	Outriggers Mid. (3.2 m) Ext. (360)					Outriggers Min. Ext. (360)				
	6.7	11.3	15.9	20.4	25.0	6.7	11.3	15.9	20.4	25.0
Operating radius (m)										
2.5	16.00	12.00	9.00	7.00		7.75	7.80	7.80	7.00	
3.0	13.00	12.00	9.00	7.00		5.55	5.60	5.60	6.10	
3.5	10.00	10.00	9.00	7.00	5.00	4.20	4.30	4.25	4.70	4.70
4.0	7.70	7.80	7.20	7.00	5.00	3.30	3.40	3.35	3.70	3.80
4.5	5.40	6.20	6.10	6.45	5.00	2.65	2.70	2.70	3.00	3.10
5.0		5.10	5.00	5.30	5.00		2.20	2.25	2.55	2.65
5.5		4.30	4.20	4.50	4.70		1.80	1.85	2.10	2.25
6.0		3.60	3.60	3.85	4.05		1.50	1.55	1.80	1.90
6.5		3.10	3.10	3.35	3.55		1.25	1.30	1.55	1.65
7.0		2.70	2.70	2.95	3.10		1.05	1.05	1.30	1.45
7.5		2.40	2.35	2.60	2.80		0.85	0.85	1.15	1.30
8.0		2.10	2.05	2.30	2.50		0.70	0.70	0.95	1.10
9.0		1.65	1.60	1.85	2.00			0.45	0.70	0.85
10.0			1.25	1.50	1.65			0.30	0.50	0.65
11.0			1.00	1.20	1.35			(9.5 m)		
12.0			0.80	1.00	1.15				0.29	0.50
13.0			0.63	0.80	0.95					0.30
14.0			0.50	0.65	0.80					
15.0			(13.6 m)							
16.0				0.55	0.65					
17.0				0.40	0.55					
18.0					0.45					
19.0					0.35					
20.0										
21.0										
22.0										
23.0										
24.0										
Min. boom angle	0°	0°	0°	29°	37°	0°	0°	45°	52°	57°

Rated crane loads

Boom rated loads (tonne) without use of outriggers

Unit: tonne

Stationary lifting								
Boom length (m)	6.7		11.3		15.9		20.4	
	Front	360	Front	360	Front	360	Front	360
Operating radius (m)								
3.0	9.50	4.40	9.50	4.50	8.50	4.65	6.50	5.00
3.5	8.30	3.50	8.30	3.65	8.30	3.70	6.50	4.00
4.0	7.30	2.80	7.30	2.90	7.30	3.00	6.50	3.30
4.5	6.60	2.20	6.40	2.40	6.60	2.45	6.50	2.75
5.0			5.45	1.90	5.65	2.00	5.35	2.30
5.5			4.60	1.60	4.70	1.65	4.45	2.00
6.0			3.95	1.30	4.00	1.35	3.90	1.70
6.5			3.40	1.05	3.50	1.10	3.60	1.40
7.0			3.00	0.85	3.00	0.90	3.25	1.20
7.5			2.60	0.65	2.70	0.70	2.95	1.00
8.0			2.30	0.50	2.30	0.50	2.65	0.80
9.0			1.80		1.85		2.15	0.55
10.0					1.50		1.75	0.35
11.0					1.20		1.45	
12.0					0.95		1.20	
13.0					0.75		1.00	
14.0							0.80	
15.0							0.65	
16.0							0.50	
17.0							0.35	
Min. boom angle	0°	0°	11°	29°	19°	48°	22°	55°

Pick and carry (2 km/h and less)								
Boom length (m)	6.7		11.3		15.9		20.4	
	Front	360	Front	360	Front	360	Front	360
Operating radius (m)								
3.0	7.00	4.35	7.20	4.40	6.50	4.45	6.00	3.00
3.5	6.15	3.30	6.30	3.35	5.75	3.60	6.00	3.00
4.0	5.40	2.60	5.60	2.65	5.00	2.85	5.60	3.00
4.5	4.75	2.10	4.70	2.10	4.15	2.30	4.80	2.50
5.0			3.90	1.75	3.50	1.90	4.10	2.10
5.5			3.30	1.45	3.00	1.55	3.50	1.80
6.0			2.80	1.20	2.65	1.30	3.00	1.50
6.5			2.40	1.00	2.30	1.10	2.60	1.30
7.0			2.10	0.80	2.00	0.90	2.30	1.10
7.5			1.85	0.65	1.80	0.70	2.05	0.90
8.0			1.60	0.50	1.65	0.50	1.80	0.77
9.0			1.30		1.30		1.50	0.50
10.0					1.00		1.20	0.30
11.0					0.70		1.00	
12.0					0.55		0.80	
13.0					0.40		0.65	
14.0							0.55	
15.0							0.45	
16.0							0.35	
17.0							0.30	
Min. boom angle	0°	0°	11°	29°	19°	48°	22°	55°

Jib and boom rated loads (tonne) with outriggers used

Jib angle	Outriggers Max. Extended – Extended (300)			Outriggers Mid. (4.2 m) – Extended (300)			Outriggers Mid. (3.2 m) – Extended (300)		
	5°	17°	30°	5°	17°	30°	5°	17°	30°
Boom angle									
80°	2.00	1.50	1.20	2.00	1.50	1.20	2.00	1.50	1.20
75°	2.00	1.50	1.20	2.00	1.50	1.20	2.00	1.50	1.20
70°	2.00	1.50	1.20	2.00	1.50	1.20	2.00	1.50	1.20
65°	1.62	1.25	1.12	1.60	1.25	1.06	1.50	1.15	1.00
60°	1.35	1.09	1.02	1.32	1.09	0.94	0.98	0.84	0.78
55°	1.15	0.98	0.91	1.07	0.93	0.82	0.65	0.58	0.56
50°	1.00	0.87	0.82	0.85	0.78	0.69	0.43	0.40	0.37
45°	0.87	0.78	0.75	0.65	0.63	0.57	0.22		
40°	0.75	0.70	0.68	0.50	0.49	0.45			
35°	0.65	0.62	0.60	0.35	0.35	0.32			
30°	0.56	0.54	0.52	0.25					
25°	0.48	0.46							
20°	0.41	0.38							
15°	0.35								
10°	0.30								
5°	0.25								
Max. boom angle	5°	20°	30°	30°	35°	35°	45°	50°	50°